

Linear actuator for 2-way and 3-way globe valves

- Actuating force 2000 N
- Nominal voltage AC 230 V
- Control: 3-point
- including bracket and valve stem coupler
- Adapter sets for third-party valves as accessories



Technical data

Electrical data	Nominal voltage	AC 230 V, 50/60 Hz
	Nominal voltage range	AC 198 ... 264 V
	Power consumption	In operation 5.5 W @ nominal force
	For wire sizing	15 VA
	Connection	Cable 1 m, 3 x 0.75 mm ²
	Parallel connection	Yes (note performance data for supply!)
Functional data	Actuating force	2000 N
	Closing force	1700 N
	Inhibiting force	
	Manual override	With hexagonal key, temporary
	Nominal stroke	50 mm
	Actuating time	7.5 s/mm or 3.75 s/mm, selectable
	Sound power level	Max. 35 dB (A)
Safety	Position indication	mechanical 8 ... 50 mm stroke
	Protection class	II Totally insulated <input type="checkbox"/>
	Degree of protection	IP54
	EMC	CE according to 2004/108/EC
	Low-voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (EN 60730-1)
	Rated impulse voltage	4 kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature	0 ... +50 °C
	Non-operating temperature	-40 ... +80 °C
	Ambient humidity	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions» on page 4
	Weight	Approx. 2.9 kg

Safety notes



- The actuator has been designed for use in stationary heating, ventilation and air conditioning systems and is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- **Caution: Power supply voltage!**
- It may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Product features

Mode of operation	The actuator is activated with a 3-point signal.
Simple attachment	A suitable adapter set ZAV.. is required for mounting the actuator on the third-party valve (see «Accessories»). The adapter set is comprised of a valve neck adapter and a valve stem coupling. The valve neck adapter makes it possible to mount the actuator on the neck of the valve to the bracket with a clamping strap. The actuator spindle is coupled to the valve stem with the valve stem coupling. The actuator can be rotated through 360° ↺ on the neck of the valve.
Manual override	The stroke can be adjusted in a voltage-free state by using a hexagonal key (5 mm), which is plugged into the actuator at the top. If the hexagonal key is turned in a clockwise direction, then the actuator spindle will extend from the actuator housing (pushing) and maintain the position until a nominal voltage is applied (the controller has first priority).
High functional reliability	The actuator is protected against short circuits, polarity reversal and overloading.
Function indication	The stroke is indicated mechanically on the bracket. The indicator adjusts itself automatically.
Combination valve/actuator	Refer to the valve documentation for suitable valves, their permitted media temperatures and closing pressures.

Accessories


	Description	Data sheet
Mechanical accessories	Adapter sets, Type ZAV-..	T6 - UNV-../ZNV-../ZAV-..

Electrical installation

Wiring diagram

Note

- Caution: Power supply voltage!
- Other actuators can be connected in parallel.
Note performance data for supply.



Cable colours:
 1 = blue
 2 = white
 3 = white
 ⚡ = yellow/green

Functions



Alignment of the operating elements





The terminals for the cable connection and the operating element S1 are located under the cover of the actuator.

By setting slide switch S1, it is possible to configure the actuator very simply on site to suit actual requirements, if changes are necessary from the factory settings.

S1.1 Closing time

S1.2 Valve closing point




S1.1	Symbol
	7.5 s/mm →
	3.75 s/mm →
S1.2	Symbol
	▲
	▼



Functional description

Function	Description	Switch
Actuating time	The running time for full stroke varies as a function of the nominal stroke. (The running time for a 20 mm stroke and the standard actuating time is 150 s).	S1.1
standard ¹⁾	Actuating time 7.5 s/mm	OFF
fast	Actuating time 3.75 s/mm	ON
Valve closing point	Closing point with actuator spindle retracted or extended.	S1.2
up ¹⁾	The actuator spindle is retracted into the actuator and the valve stem is extended from the fitting.	OFF
down	The actuator spindle is extended from the actuator and the valve stem is retracted into the fitting.	ON

¹⁾ Factory settings

3-point control




Symbols								Actuator spindle moves	
Actuating time	Closing point Valve	Actuating time standard	Actuating time fast	Closing point up	Closing point down	Relay contact a (Y1)	Relay contact b (Y2)		
7.5 s/mm →	▲	OFF		OFF		0	0	stops	stops
	▼	OFF			ON	1	0	ON	OFF
	▲		ON	OFF		0	1	ON	OFF
	▼		ON		ON	1	0	ON	OFF

Note

The actuator spindle direction can also be reversed by inverting the Y1 and Y2 wires.

Dimensions [mm]

Dimensional drawings

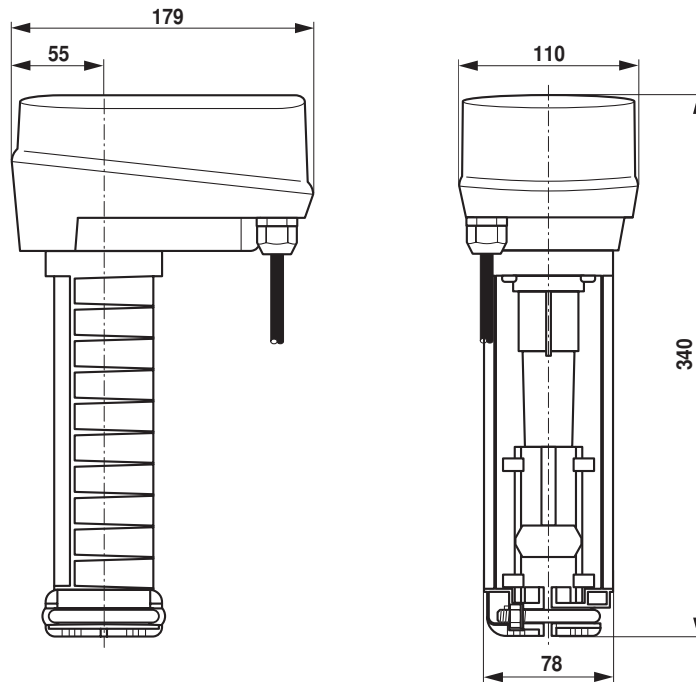

Further documentations

- Overview of brackets and adapter sets
- Installation instructions for actuators
- Notes for project planning (hydraulic characteristic curves and circuits, installation regulations, commissioning, maintenance etc.)