



# TG-KH/PT...

## Duct sensors

Temperature sensors with PT100- or PT1000-element intended for duct mounting.

- M16 cable gland
- Bayonet mounted cover
- 10 mm hole for probe
- Adjustable insertion length and tight closing
- Compact and modern design

Immersion sensors in the Tempero-series with a modern design that fits into any environment. The sensors are intended for duct mounting. TG-KH/PT100 and TG-KH/PT1000 have adjustable insertion length and an elastic and flexible mounting bracket that closes tightly against ducts.


## Models

TG-KH/PT100	Duct sensor with housing, PT100-element
TG-KH/PT1000	Duct sensor with housing, PT1000-element

## Technical data

Temperature range	-30...+70°C
Sensor element	PT100/PT1000, DIN class B
Time constant	16 s
Insertion length	60...230 mm, adjustable
Probe diameter	Ø 8 mm
Protection class	IP65

## Dimensions (mm)

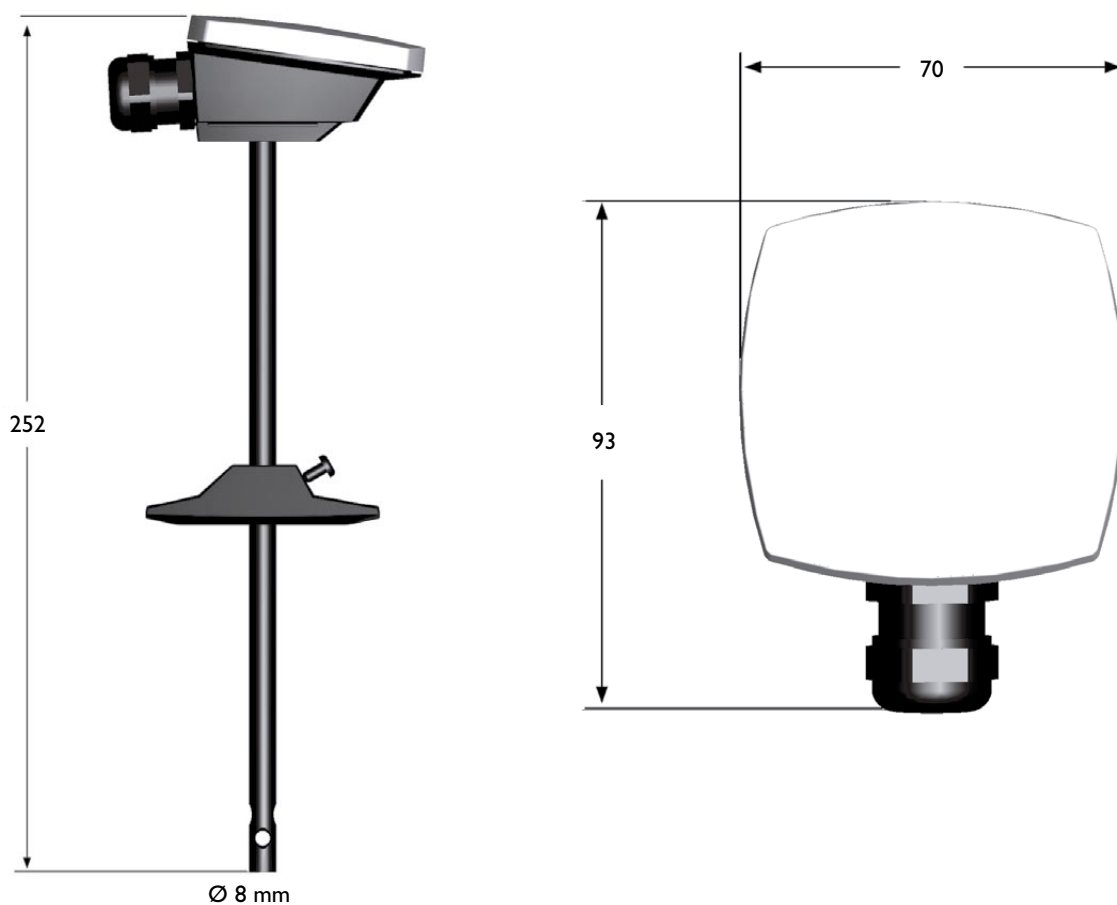

### AB Regin

Box 116, SE-428 22 Källered, Sweden  
Visiting address: Bangårdsvägen 35

Phone: +46 31 720 02 00  
Fax: +46 31 94 01 46  
[www.regin.se](http://www.regin.se), [info@regin.se](mailto:info@regin.se)

**REGIN**

THE CHALLENGER IN BUILDING AUTOMATION