



DN 15 and DN 25



DN 40...150



3-Port Seat Valves with Flange, PN 40

VXF61...

- Cast steel GP240GH valve body
- DN 15...150
- k_{vs} 1.9...300 m³/h
- Can be equipped with SKD..., SKB... and SKC... electrohydraulic actuators

Use

For use in district heating, heating, ventilating, and air conditioning systems as a control valve for «mixing» and «diverting» functions.

For closed or open circuits.

Silicon-free valve versions with type suffix ...5 available.

Type summary

Type	DN	k _{vs} [m ³ / h]	S _v
VXF61.14	15	1.9	>50
VXF61.15		3	
VXF61.24	25	5	
VXF61.25		7.5	
VXF61.39	40	12	>50
VXF61.40		19	
VXF61.49	50		
VXF61.50		31	
VXF61.65	65	49	
VXF61.80	80	78	
VXF61.90	100	124	
VXF61.91	125	200	
VXF61.92	150	300	

DN = Nominal size

k_{vs} = Nominal flow rate of cold water (5...30 °C) through the fully open valve (H_{100}) by a differential pressure of 100 kPa (1 bar)

S_v = Rangeability k_{vs} / k_{vr}

k_{vr} = Smallest k_v value, at which the flow characteristic tolerances can still be maintained, by a differential pressure of 100 kPa (1 bar)

Special versions

Type	Type suffix	Description	Examples
VXF61...2	2	Sealing gland with PTFE sleeve, for 220...350 °C with thermal insulator	VXF61.242
VXF61...5	5	Sealing gland with PTFE sleeve, silicon-free version, for up to 220 °C	VXF61.145

Accessories

Type	Description
ASZ6.5	Electric stem heating element, AC 24 V / 30 W, required for media below 0 °C

Order

When ordering please give quantity, product name and type reference.

Example: 2 three-port valves VXF61.50

Delivery

Valves, actuators and accessories are packed and supplied separately.

The valves are supplied without counter-flanges and without flange gaskets.

The thermal insulator of special version with type suffix 2 is factory-mounted in the valve on delivery.

This thermal insulator cannot be retrofitted or ordered separately

Spare parts

See overview, section „Spare parts“, page 9

Equipment combinations

Valves		Actuators					
		SKD... ¹⁾		SKB...		SKC...	
		Mixing	Diverting ²⁾	Mixing	Diverting ²⁾	Mixing	Diverting ²⁾
	H ₁₀₀ [mm]	Δp _{max} [kPa]					
VXF61.14	20	1200	500	1600	500		
VXF61.15							
VXF61.24							
VXF61.25							
VXF61.39				1200			
VXF61.40				1000			
VXF61.49							
VXF61.50							
VXF61.65	40				800	350	
VXF61.80					500	250	
VXF61.90					300	150	
VXF61.91					200	100	
VXF61.92					125	70	

¹⁾ Usable up to maximum medium temperature of 150 °C

²⁾ If noise is permitted, the same values apply as for mixing.

H₁₀₀ = Nominal stroke

Δp_{\max} = Maximum permissible differential pressure across the valve (mixing: port II-I, III-I, diverting: port I-II, I-III), valid for the entire actuating range of the motorized valve

Actuator overview

Type	Actuator type	Operating voltage	Positioning signal	Spring return	Positioning time	Positioning force	Data sheet
SKD32.50	Electro-hydraulic	AC 230 V	3-position	No	120 s	1000 N	N4561
SKD32.21				Yes	30 s		
SKD32.51				No	120 s		
SKD82.50		AC 24 V	DC 0...10 V ¹⁾	Yes	30 s	2800 N	N4566
SKD82.51				No			
SKD60				Yes			
SKD62				No			
SKB32.50	Electro-hydraulic	AC 230 V	3-position	No	120 s	2800 N	N4564
SKB32.51				Yes			
SKB82.50		AC 24 V	DC 0...10 V ¹⁾	No			
SKB82.51				Yes			
SKB60				No			
SKB62				Yes			
SKC32.60	Electro-hydraulic	AC 230 V	3-position	No	120 s	2800 N	N4564
SKC32.61				Yes			
SKC82.60		AC 24 V	DC 0...10 V ¹⁾	No			
SKC82.61				Yes			
SKC60				No			
SKC62				Yes			

¹⁾ or DC 4...20 mA

Pneumatic actuators

Pneumatic actuators are available on request from your local office.



Application is possible only if the VXF61... is used as a mixing valve!


Valve cross section

Depending on the nominal size, a guided parabolic, perforated or slot plug is used that is directly connected to the valve stem.

The seats are screwed to the valve body with the aid of special gland material.


DN 15 and DN 25

DN 40...150

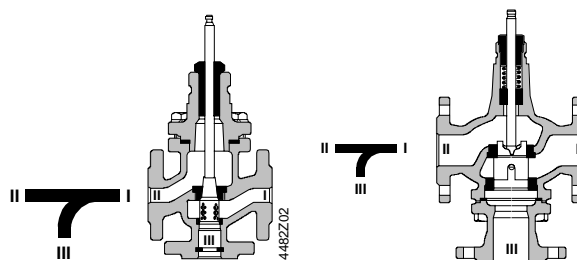


Thermal insulator

Thermal insulator for special version with type suffix 2, required for media from 220 °C to 350 °C; factory-mounted on the valve on delivery.



Sizing

Flow diagram «Mixing»

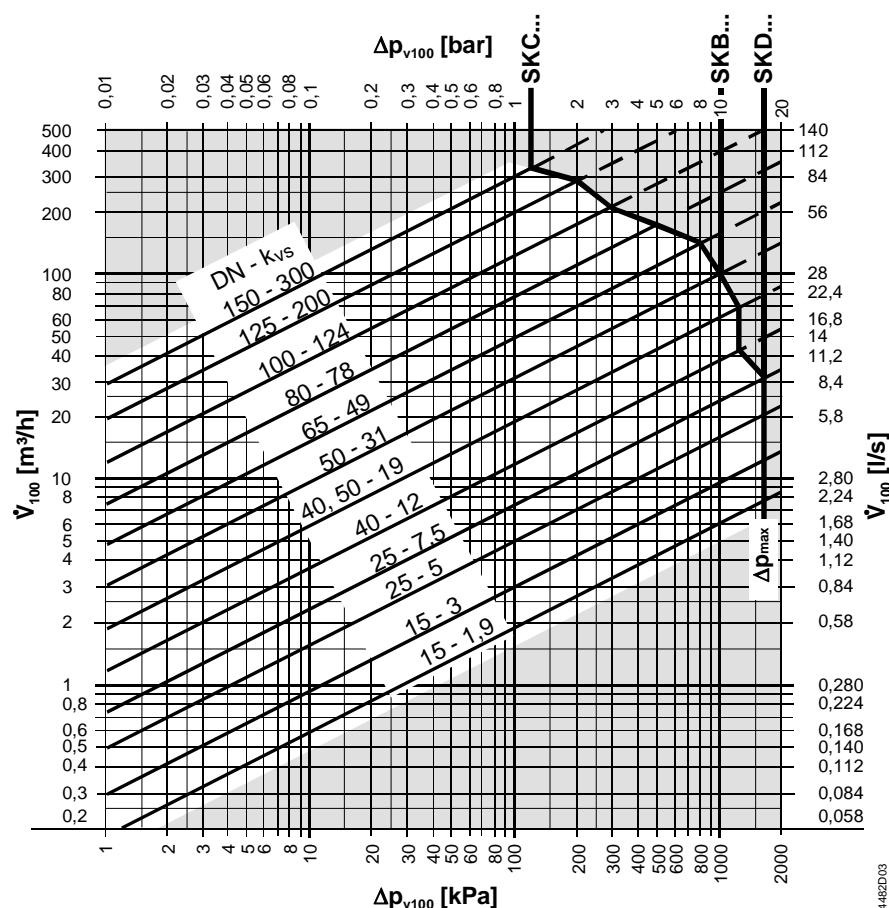

Δp_{\max} = Maximum permissible differential pressure across the valve (mixing: port II-I, III-I, diverting: port Tore I-II, I-III), valid for the entire actuating range of the motorized valve


Δp_{V100} = Differential pressure across the fully open valve and the valve's control path II → I, III → I by a volume flow V_{100}

\dot{V}_{100} = Volumetric flow through the fully open valve (H_{100})

100 kPa = 1 bar ≈ 10 mWC

1 m³/h = 0.278 l/s water at 20 °C

Valve flow characteristic

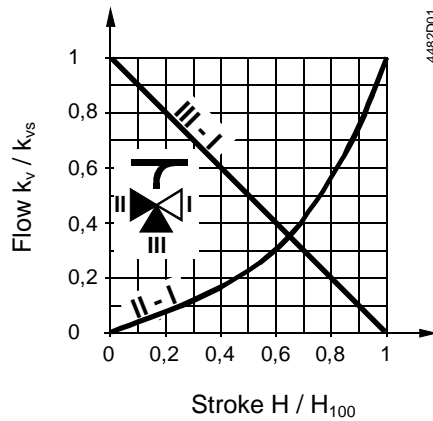

Through-port

0...30 %: linear

30...100 %: $n_{gl} = 3$ as per VDI / VDE 2173

Bypass

0...100 %: linear

Mixing: Flow from port II and port III to port I

Diverting: Flow from port I to port II and port III


Port I = constant flow

Port II = variable flow

Port III = bypass (variable flow)

Use the 3-port valve primarily as a mixing valve.

Working pressure and medium temperature

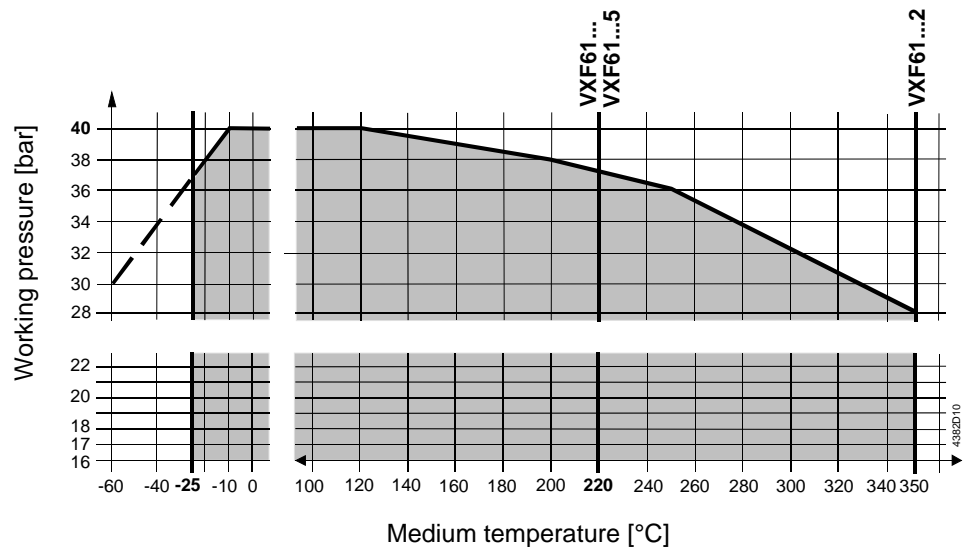

Working pressure and medium temperature staged as per ISO 7005

Current local legislation must be observed.

Notes

Engineering



We recommend installation in the return pipe, as the temperatures in this pipe are lower for applications in heating systems, which in turn, extends the stem sealing gland's life.

In open circuits the valve plug may seize as the result of scale deposits. In these applications, only the most powerful SKB... or SKC... actuators should be used. Further the valve should be exercised at regular intervals (two to three times per week). A strainer **MUST** be fitted at the valve inlet



To ensure the reliability of the valve, we recommend the fitting of a strainer at the valve inlet even in closed circuits.



For media below 0 °C, use the electric ASZ6.5 stem heating element to prevent the valve stem from freezing in the sealing gland. For safety reasons, the stem heating element has been designed for AC 24 V / 30 W operating voltage.


Mounting

Both valve and actuator can easily be assembled at the mounting location. Neither special tools nor adjustments are required.

The thermal insulator for thermo oil applications is factory-mounted. The actuator is directly mounted on the thermal insulator instead of the valve

The valve is supplied with Mounting Instructions 74 319 0519 0.

Orientation



Direction of flow

When mounting, pay attention to the valve's flow direction symbol →.

Mixing from
II / III to I



Diverting from
I to II / III



Commissioning



Commission the valve only if the actuator has been mounted correctly.

Valve stem retracts: through-port II – I opens, bypass III closes

Valve stem extends: through-port II – I closes, bypass III opens

Maintenance

Warning



VXF61... valves require no maintenance.

When doing service work on the valve / actuator:

- Deactivate the pump and turn off the power supply
 - Close the shutoff valves
 - Fully reduce the pressure in the piping system, allow pipes to completely cool down
- If necessary, disconnect the electrical wires.

Before putting the valve into operation again, make certain the actuator is correctly fitted.


Stem sealing gland

The glands can be exchanged without removing the valve, provided the pipes are depressurized and cooled off and the stem surface is unharmed.

If the stem is damaged in the gland range, replace the entire stem-plug-unit.

Contact your local office or branch.

Disposal



Before disposal the valve must be dismantled and separated into its various constituent materials.

Legislation may demand special handling of certain components, or it may be sensible from an ecological point of view.

Current local legislation must be observed.

Warranty

The technical data given for these applications is valid only in conjunction with the Siemens actuators as detailed under «Equipment combinations».

All terms of the warranty will be invalidated by the use of actuators from other manufacturers.

Technische Daten

Functional data	PN class		PN 40 to ISO 7268
	Working pressure		to ISO 7005 within the permissible medium temperature range according to the diagram on page 5
	Flow characteristic		
	through-port	0...30 %	linear
		30...100 %	equal percentage; $n_{gl} = 3$ to VDI / VDE 2173
	bypass	0...100 %	linear
	Leakage rate		
	through-port		0...0.02 % of k_{vs} value to DIN EN 1349
	bypass		0.5...2 % of k_{vs} value to DIN EN 1349
	Permissible media	water	chilled water, cooling water, low temperature hot water, high temperature hot water, water with anti-freeze; recommendation: water treatment to VDI 2035
		brine	
		heat transfer oils	
	Medium temperature		max. 220 °C (350 °C)
	water, brine ¹⁾		-25...220 °C
	heat transfer oils ²⁾		≤ 350 °C
Industry standards	Rangeability S_v		DN 15...25: >50 (VXF61.25: >100) DN 25...150: >100
	Nominal stroke		DN 15...50: 20 mm DN 65...150: 40 mm
	Pressure Equipment Directive		PED 97/23/EC
	Pressure Accessories		as per article 1, section 2.1.4
Materials	Fluid group 2	DN 15...25	without CE-marking as per article 3, section 3 (sound engineering practice)
		DN 40...80	category I, with CE-marking
		DN 100...150	category II, with CE-marking, test authority number 0036
	Valve body		cast steel GP240GH
Dimensions / Weight	Stem		stainless steel
	Plug, seats		stainless steel
	Sealing gland ³⁾		stainless steel
	Gland materials		PTFE sleeves
Dimensions / Weight	Refer to «Dimensions»		
	Flange connections		to ISO 7005


¹⁾ Electric stem heating element ASZ6.5 required for media below 0 °C

²⁾ For 220...350 °C with thermal insulator, type suffix 2. Use electrohydraulic SKB... or SKC...actuators.

³⁾ Silicon-free version with type suffix 5

Dimensions

Dimensions in mm

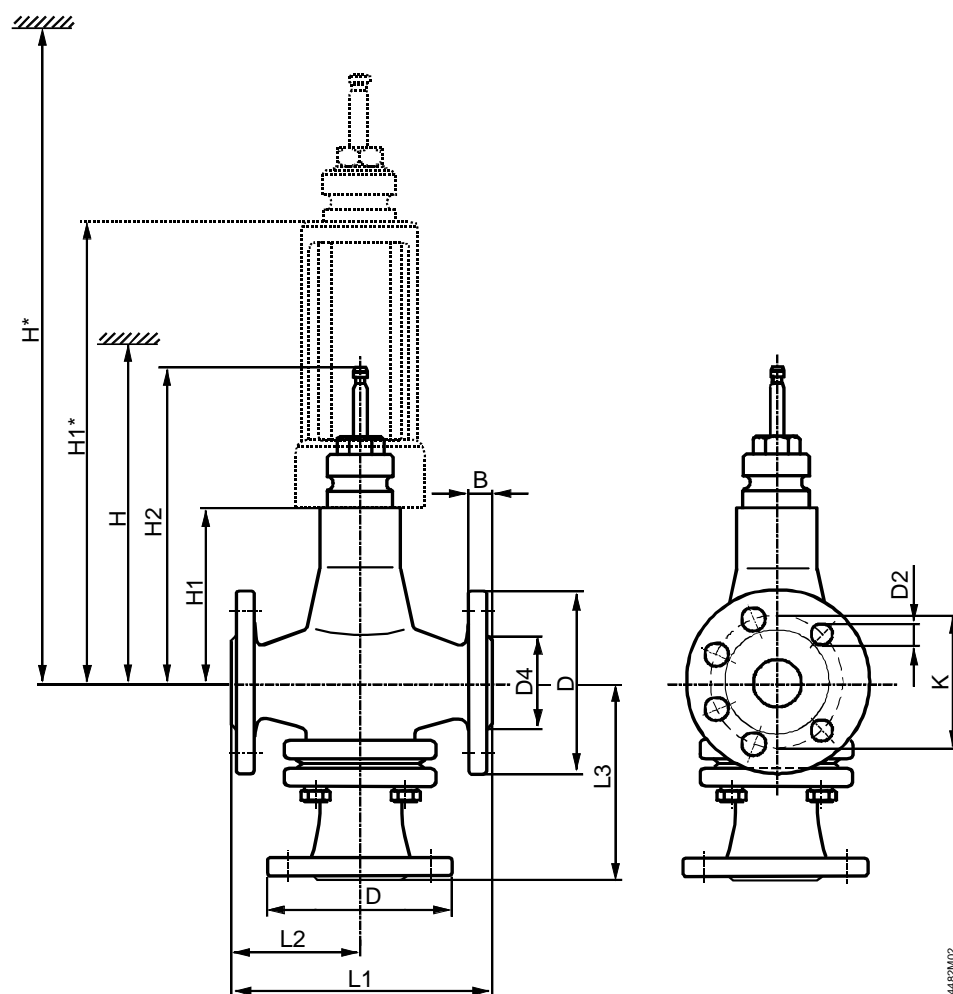

4452M02

DN	B	D Ø	D2 Ø	D4 Ø	K	L1	L2	L3	H1	H2	H			H1*	H*			kg	
											SKD...	SKB...	SKC...		SKD...	SKB...	SKC...	VXF61...	VXF61...2
15	16	95	14 (4x)	46	65	130	65	65	96	192.5	>496	>671		276	>676	>851		6.3	9.6
25	18	115		67	85	160	80	80	111	207.5	>511	>686		291	>691	>866		9	12.3
40	20	150	18 (4x)	84	110	200	100	162	136	232.5		>711		316		>891		18.5	22
50	22	165		99	125	230	115	170										21.5	25
65	24	185	18 (8x)	118	145	290	145	215	162	278.5			>737	342			>917	35	38.5
80	26	200		132	160	310	155	230	170	286.5			>745	350			>925	42	45.5
100	28	235	22 (8x)	156	190	350	175	250	180	296.5			>755	360			>935	61.5	65
125	30	270	26 (8x)	184	220	400	200	280	200	316.5			>775	380			>955	85.5	89
150	32	300		211	250	480	240	305	225	341.5			>800	405			>980	126	129.5



DN = Nominal size

H = Total actuator height plus minimum distance to the wall or the ceiling for mounting, connection, operation, maintenance etc.

H1 = Dimension from the pipe centre to install the actuator (upper edge)

H2 = Valve in the «Closed» position means that the stem is fully extended

Order numbers for spare parts

		Sealing gland					Set	
							Plug with stem, circlip, sealing	
Type	DN	VXF61...	VXF61..2	VXF61...5	VXF61...	VXF61...5	VXF61..., VXF61...5	VXF61...2
VXF61.14	15	4 284 8829 0	4 284 8829 0	4 284 9538 0			74 676 0160 0	
VXF61.15	15	4 284 8829 0	4 284 8829 0	4 284 9538 0			74 676 0136 0	
VXF61.24	25	4 284 8829 0	4 284 8829 0	4 284 9538 0			74 676 0029 0	
VXF61.25	25	4 284 8829 0	4 284 8829 0	4 284 9538 0			74 676 0030 0	
VXF61.39	40		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0044 0	74 676 0091 0
VXF61.40	40		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0045 0	74 676 0092 0
VXF61.49	50		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0069 0	74 676 0093 0
VXF61.50	50		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0070 0	74 676 0094 0
VXF61.65	65		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0071 0	74 676 0083 0
VXF61.80	80		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0072 0	74 676 0084 0
VXF61.90	100		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0073 0	74 676 0085 0
VXF61.91	125		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0074 0	74 676 0086 0
VXF61.92	150		4 284 8829 0		4 679 5630 0	4 284 9540 0	74 676 0075 0	74 676 0087 0

